



9,88 mm

CLAIR

20 mm

You Dream We Deliver



Fix and Relax
Web: www.clairjg.com

Price List - Technical
wef. 1st November, 2025



CLAIR



INDEX

- **About Company & Certifications**1
- **Credential & Esteemed Clients**2-3
- **Bulbs & Emergency Bulbs**4-11
- **Batten & Tube Lights**12-17
- **Downlights & Surface lights**18-19
- **COB Lights**20-22
- **Flood & Canopy Lights**23
- **Street & Emergecny Street Lights**24
- **High Bay Lights**25-26
- **Linear Lights**27-30
- **Rope, Strip Lights & Drivers**31
- **Industrail, Outdoor & Underground Lights**.....32-33
- **Insulation Tape**31
- **List of Clients & Branches**32-33

Clair

Government Projects:

Successfully supplied and installed



15000+
Canopy Lights



50000+
Street Lights

50000+
Flood Lights



25000+
Ceiling Lights



10000+
Flame Proof
Lights



2000000+
Tube Lights



10000+
High mast Lights

Esteemed Clients



MORE

About CLAIR

CLAIR Electronics Pvt. Ltd. is an associated company of J.G. Group established since 1909 and lighting division came into existence in year 2006 with state of art manufacturing unit of CFL lamps, CLAIR launched led lighting product in years 2012.

"CLAIR Electronics Pvt. Ltd." is established with the main objective of manufacturing LED lighting products for indoor and outdoor Lighting applications. The project envisaged is setting up of a state-of-the-art full-fledged LED Lighting fixture manufacturing and assembly line, first of its kind in Noida with a capacity of 20 million Lighting products per annum.

We are playing leading role in this culture of LED Innovation. We strive to become the global provider of intelligent environment – friendly LED lighting solutions for professional and Consumer applications. The overall vision of the company is to provide high performance lighting solutions and significantly reduce our customers' carbon footprint and energy demand in a way that is economically compelling and adds to their cash flow.

Due to their long life and high efficiency LEDs requires less frequently recycling than conventional light sources. In addition, with the rapid advancement in performance of LEDs, they are five times more efficient than traditional incandescent or halogen bulbs, making them the most energy- efficient and cost-effective lighting option over the system life. LEDs don't contain mercury or other hazardous materials like compact fluorescent bulbs do, so they can be handled and disposed of safely.



Factory Building
(100000sq ft Production Area)



Upcoming Factory in Tirupati,
Andhra Pradesh




Quality Control and R&D Team



SMT



Production Line

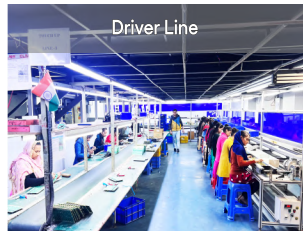

Driver Line

Certifications



BULB SERIES Handsome

- Long life : 25000 hours
- In-built surge protection of 4 kV
- Lumens Efficacy range lies between 108 to 110 lm/W as per BEE guidelines
- Saving upto 85 % energy in comparison with ordinary Incandescent bulb



CRI > 80



Surge Protection 4KV



ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	LUMEN	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLBLB00306K	03W	220-240Vac,50Hz	>0.90	330lm	100pcs	₹ 80.00	● ○ ○
CLBLB00506K	05W	220-240Vac,50Hz	>0.90	550lm	100pcs	₹ 90.00	● ● ○
CLBLB00706K	07W	220-240Vac,50Hz	>0.90	770lm	100pcs	₹ 100.00	● ● ● ○
CLBLB00906K	09W	220-240Vac,50Hz	>0.90	990lm	100pcs	₹ 110.00	● ● ● ● ○
CLBLB01006K	10W	220-240Vac,50Hz	>0.90	1100lm	100pcs	₹ 120.00	● ● ● ● ● ○
CLBLB01206K	12W	220-240Vac,50Hz	>0.90	1320lm	50pcs	₹ 1400.00	● ● ● ● ● ○
CLBLB01506K	15W	220-240Vac,50Hz	>0.90	1650lm	30pcs	₹ 215.00	● ● ● ● ● ○
CLBLB01806K	18W	220-240Vac,50Hz	>0.90	1980lm	30pcs	₹ 225.00	● ● ● ● ● ○
CLBLB02006K	20W	220-240Vac,50Hz	>0.90	2200lm	20pcs	₹ 325.00	● ● ● ● ● ○
CLBLB02406K	24W	220-240Vac,50Hz	>0.90	2640lm	20pcs	₹ 355.00	● ● ● ● ● ○
CLBLB03006K	30W	220-240Vac,50Hz	>0.90	3300lm	10pcs	₹ 485.00	● ● ● ● ● ○
CLBLB04006K	40W	220-240Vac,50Hz	>0.90	4500lm	10pcs	₹ 680.00	● ● ● ● ● ○
CLBLB05006K	50W	220-240Vac,50Hz	>0.90	5500lm	10pcs	₹ 795.00	● ● ● ● ● ○
CLBLB06506K	65W	220-240Vac,50Hz	>0.90	6500lm	10pcs	₹ 960.00	● ● ● ● ● ○

GOLD Handsome

- Long life : 25000 hours
- In-built surge protection of 4 kV
- Lumens Efficacy range lies between 108 to 110 lm/W as per BEE guidelines
- Saving upto 85 % energy in comparison with ordinary Incandescent bulb



CRI > 80



Surge Protection 4KV



ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	LUMEN	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLBLG00906K	09W	220-240Vac,50Hz	>0.90	990lm	50pcs	₹ 125.00	● ● ○

Inverter

- Long life : 25000 hours
- In-built surge protection of 4 kV
- Lumens Efficacy range lies between 110 to 120 lm/W
- Up to 4hrs backup after fully charge
- Internal lithium ion battery need 4-5 hours in to charge for fit to last up to 4 hours on battery.
- Lithium ion battery will charge when light switch ON.
- In case battery completely Drained keep switch on for 2-3 hours to charge battery.



CRI > 80



Surge Protection 4KV



ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	AC LUMEN	DC LUMEN	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLBIN00906K	09W	220-240Vac, 50Hz	>0.90	900lm	300lm	20pcs	₹ 551.00	● ● ○
CLBIN01006K	10W	220-240Vac, 50Hz	>0.90	900lm	400lm	20pcs	₹ 411.00	● ● ● ○
CLBIN01206K	12W	220-240Vac, 50Hz	>0.90	1320lm	500lm	20pcs	₹ 640.00	● ● ● ● ○
CLBIN02006K	20W	220-240Vac, 50Hz	>0.90	2000lm	550lm	20pcs	₹ 1150.00	● ● ● ● ● ○

BATTEN - TUBELIGHT SERIES

T-5 Adventa



- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90 - 300Vac
- Long life : 25000 hours
- Polycarbonate Housing .



CRI > 80



System Lumen
100-110Lm/W



Input
90~300Vac



Surge Protection
4KV

ITEM CODE	WATTAGE	SERIES	POWER FACTOR	DIMENSION L W H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLADT00506K	05W	ADVENTA	>0.90	300x22x30	20pcs	₹ 185.00	● ○ ○ ○
CLADT01006K	10W		>0.90	600x22x30	20pcs	₹ 200.00	● ● ○ ○
CLADT02006K	20W		>0.90	1100x22x30	20pcs	₹ 235.00	● ● ● ○
CLADT02206K	22W		>0.90	1100x22x29	20pcs	₹ 215.00	● ● ● ○
CLADT02206K	22W		>0.90	1100x22x32	20pcs	₹ 260.00	● ● ● ○
CLADT02406K	24W		>0.90	1130x22x32	20pcs	₹ 290.00	● ● ● ○

Available in Aluminium Housing also on demand

ZD Adventa - Elenta

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90 - 300Vac
- Long life : 25000 hours
- Aluminium Housing & Virgin Polycarbonate diffuser for best diffused light.



CRI > 80



System Lumen
100-110Lm/W




Surge Protection
Upto 4KV

ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L W H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLZDB01806K	18W	220-240Vac, 50Hz	>0.90	594x70x25	20pcs	₹ 1300.00	● ● ○ ○
CLZDB02006K	20W	220-240Vac, 50Hz	>0.90	594x70x25	20pcs	₹ 1450.00	● ● ○ ○
CLZDB04006K	40W	220-240Vac, 50Hz	>0.90	1194x70x25	20pcs	₹ 2800.00	● ● ○ ○

#ZD Elenta design is patented to Clair.

Rainbow

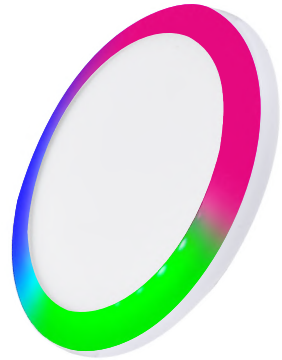


- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- Virgin Polycarbonate Housing



ITEM CODE	WATTAGE	DIMENSIONS Outer (LxH mm)	DIMENSIONS Cutout (mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR CHARGING BY SWITCHING
CLRNB006MTC	06W	Ø 88x45	Ø 48mm	>0.90	30pcs	₹ 370.00	PBG-CW=PBG+CW
CLRNB012MTC	12W	Ø 115x45	Ø 50mm	>0.90	30pcs	₹ 600.00	PBG-CW=PBG+CW

Rainbow Plus

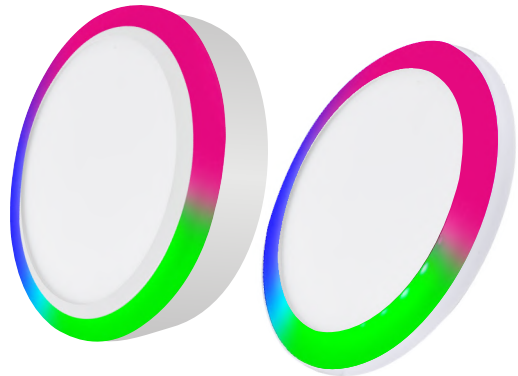

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- Virgin Polycarbonate Housing



ITEM CODE	WATTAGE	DIMENSIONS Outer (LxH mm)	DIMENSIONS Cutout (mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR CHARGING BY SWITCHING
CLRNP003MTC	03+03W	Ø103x24	Ø 75mm	>0.90	20pcs	₹ 350.00	PBG-CW=PBG+CW
CLRNP006MTC	06+06W	Ø 143x28	Ø 102mm	>0.90	20pcs	₹ 410.00	PBG-CW=PBG+CW
CLRNP012MTC	12+12W	Ø 170x28	Ø 154mm	>0.90	20pcs		PBG-CW=PBG+CW

T-8 Adventa

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours



* Aluminium Housing & Virgin Polycarbonate diffuser for best diffused light.



ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L W (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLB18WF	18W	90-300Vac, 50Hz	>0.90	1210x31.5	20pcs	₹ 650.00	● ● ○
CLB22WF	22W	90-300Vac, 50Hz	>0.90	1210x.31.5	20pcs	₹ 870.00	● ● ○

Note : Price will different of PC & Aluminium Housing.

Prima LED T5 Batten Light

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- Aluminium Housing



ITEM CODE	WATTAGE	DIMENSION L W H (mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLP24WT5	24W	1180x24x38	>0.90	20pcs	₹ 650.00	● ● ○
CLP30WT5	30W	1180x24x38	>0.90	20pcs	₹ 1600.00	● ● ○
CLP40WT5	40W	1190x30x43	>0.90	20pcs	₹ 1700.00	● ● ○
CLB50WS	50W	1175x37x23	>0.90	20pcs	₹ 2100.00	● ● ○
CLB65WS	65W	1175x37x23	>0.90	20pcs	₹ 3000.00	● ● ○

Sago

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 120- 300Vac
- Long life : 25000 hours
- IP65



ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	BEAM ANGLE	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLPC-PC40W	40W	120-300Vac, 50Hz	>0.90	120°	20pcs	₹ 6500.00	● ● ○

DOWNLIGHT SERIES

Irish & Irish Flower

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- Aluminium diecast Housing



ITEM CODE	WATTAGE	DIMENSIONS Outer (LxH mm)	Shape	DIMENSIONS Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLIRR00306K	03W	∅ 83x25	Round	∅ 67mm	20pcs	₹ 300.00	● ● ○
CLIRR00606K	06W	∅ 118x25		∅ 107mm	20pcs	₹ 460.00	● ● ○
CLIRR00906K	09W	∅ 118x25		∅ 107mm	20pcs	₹ 650.00	● ● ○
CLIRR01206K	12W	∅ 170x25		∅ 154mm	20pcs	₹ 680.00	● ● ○
CLIRR01506K	15W	∅ 170x25		∅ 154mm	20pcs	₹ 950.00	● ● ○
CLIRR01806K	18W	∅ 225x25		∅ 205mm	10pcs	₹ 1000.00	● ● ○

CLIRS00306K	03W	85x85x25	Square	70x70mm	20pcs	₹ 300.00	● ● ○
CLIRS00606K	06W	120x120x25		100x100mm	20pcs	₹ 460.00	● ● ○
CLIRS00906K	09W	120x120x25		100x100mm	20pcs	₹ 650.00	● ● ○
CLIRS01206K	12W	170x170x25		154x154mm	20pcs	₹ 680.00	● ● ○
CLIRS01506K	15W	170x170x25		154x154mm	20pcs	₹ 950.00	● ● ○
CLIRS01806K	18W	225x225x25		205x205mm	10pcs	₹ 1000.00	● ● ○

ITEM CODE	WATTAGE	DIMENSIONS Outer (LxH mm)	Shape	DIMENSIONS Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR CHARGING BY SWITCHING
CLIRF003MTC	3+3W	∅ 88x42	Round	∅ 48mm	20pcs	₹ 700.00	PBG-CW=PBG+CW
CLIRF009MTC	6+3W	∅ 115x45		∅ 48mm	20pcs	₹ 800.00	PBG-CW=PBG+CW
CLIRF016MTC	12+4W	∅ 115x45		∅ 48mm	20pcs	₹ 1200.00	PBG-CW=PBG+CW

Adventa


- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- Polycarbonate Housing



ITEM CODE	WATTAGE	DIMENSIONS Outer (LxH mm)	Shape	DIMENSIONS Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLADR00306K	03W	∅ 83x25	Round	∅ 67mm	50pcs	₹ 350.00	● ● ○
CLADR00606K	06W	∅ 118x25		∅ 107mm	20pcs	₹ 390.00	● ● ○
CLADR01206K	12W	∅ 170x25		∅ 154mm	20pcs	₹ 580.00	● ● ○
CLADR01806K	18W	∅ 225x25		∅ 205mm	10pcs	₹ 820.00	● ● ○

CLADS00306K	03W	85x85x25	Square	67x67mm	50pcs	₹ 350.00	● ● ○
CLADS00606K	06W	118x118x25		107x107mm	20pcs	₹ 390.00	● ● ○
CLADS01206K	12W	170x170x25		154x154mm	20pcs	₹ 580.00	● ● ○
CLADS01806K	18W	225x225x25		205x205mm	10pcs	₹ 820.00	● ● ○

Orion & Orion New Backlit

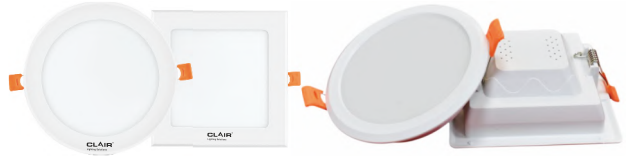

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours



ITEM CODE	WATTAGE	DIMENSIONS Outer (LxH mm)	Shape	DIMENSIONS (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLONR00606K	06W	∅ 95x30	Round	∅ 79mm	20pcs	₹ 245.00	● ● ● ○
CLORR00806K	08W	∅ 116x35		∅ 100mm	20pcs	₹ 385.00	● ● ● ○
CLONR01006K	10W	∅ 129x30		∅ 106mm	20pcs	₹ 370.00	● ● ● ○
CLONR01206K	12W	∅ 129x30		∅ 106mm	20pcs	₹ 400.00	● ● ● ○
CLONR01506K	15W	∅ 148x30		∅ 123mm	20pcs	₹ 465.00	● ● ● ○
CLORR01506K	15W	∅ 167x35		∅ 148mm	20pcs	₹ 645.00	● ● ● ○
CLONR02006K	20W	∅ 172x30		∅ 151mm	20pcs	₹ 655.00	● ● ● ○
CLORR02006K	20W	∅ 220x35		∅ 151mm	20pcs	₹ 1075.00	● ● ● ○

ITEM CODE	WATTAGE	DIMENSIONS Outer (LxH mm)	Shape	DIMENSIONS (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLONS00606K	06W	∅ 95x95x30	Square	∅ 79mm	20pcs	₹ 245.00	● ● ● ○
CLORS00806K	08W	∅ 116x116x35		∅ 100mm	20pcs	₹ 385.00	● ● ● ○
CLONS01006K	10W	∅ 129x129x30		∅ 106mm	20pcs	₹ 370.00	● ● ● ○
CLONS01206K	12W	∅ 129x129x30		∅ 106mm	20pcs	₹ 400.00	● ● ● ○
CLONS01506K	15W	∅ 148x148x30		∅ 123mm	20pcs	₹ 465.00	● ● ● ○
CLORS01506K	15W	∅ 167x167x35		∅ 148mm	20pcs	₹ 645.00	● ● ● ○
CLONS02006K	20W	∅ 172x172x30		∅ 151mm	20pcs	₹ 655.00	● ● ● ○
CLORS02006K	20W	∅ 220x220x35		∅ 151mm	20pcs	₹ 1075.00	● ● ● ○

Orion Add-on



- Orion can be fixed on ceiling surface after adding orion add-on ring
- Made of virgin PC, Unbreakable, Long lasting unfade over years

ITEM CODE	DIMENSIONS Outer (LxH mm)	Shape	STANDARD PACKING	LIST PRICE (₹ Per Unit)
CLAD08	∅ 118x35	Round	20pcs	₹ 100.00
CLAD15	∅ 170x35		20pcs	₹ 140.00
CLAD20	∅ 224x35		20pcs	₹ 180.00

CLAD08	118x118x35	Square	20pcs	₹ 100.00
CLAD15	170x170x35		20pcs	₹ 140.00
CLAD20	224x224x35		20pcs	₹ 180.00

Twinkle Conceal



- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90-300Vac
- Long life : 25000 hours



CRI > 80



System Lumen
100Lm/W



Input
90-300Vac



Surge Protection
4KV

ITEM CODE	WATTAGE	DIMENSIONS Outer (LxH mm)	DIMENSIONS Cutout (mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CSK03W	03W	Ø 80x83	Ø 58mm	>0.90	50pcs	₹ 175.00	● ● ○
CSK03W	03W	Ø 80x83	Ø 58mm	>0.90	50pcs	₹ 185.00	● ● ●
CLCE03W	03W	Ø 80x83	Ø 58mm	>0.90	50pcs	₹ 270.00	● ● ○
CLCE03W	03W	Ø 80x83	Ø 58mm	>0.90	50pcs	₹ 280.00	● ● ●
CLCE05W	05W	Ø 110x54	Ø 78mm	>0.90	50pcs	₹ 200.00	● ● ○
CLCE05W	05W	Ø 110x54	Ø 78mm	>0.90	50pcs	₹ 220.00	● ● ●
CLCE05L	05W	Ø 110x40	Ø 75mm	>0.90	50pcs	₹ 190.00	● ● ○
CLCE07W	07W	Ø 110x54	Ø 78mm	>0.90	50pcs	₹ 260.00	● ● ○
CLCE07W	07W	Ø 110x54	Ø 78mm	>0.90	50pcs	₹ 285.00	● ● ●
CLCE09W	09W	Ø 108X60	Ø 78mm	>0.90	20pcs	₹ 360.00	● ● ○
CLCE09W	09W	Ø 108X60	Ø 78mm	>0.90	20pcs	₹ 385.00	● ● ●

*Virgin Polycarbonate Housing (Unbreakable), Long Lasting Unfade Colour.

Twinkle Pro



- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90-300Vac
- Long life : 25000 hours



CRI > 80



System Lumen
100-110Lm/W



Input
90-300Vac



Surge Protection
4KV

*Virgin Polycarbonate Housing (Unbreakable), Long Lasting Unfade Colour.

ITEM CODE	WATTAGE	DIMENSIONS Outer (LxH mm)	DIMENSIONS Cutout (mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCNP00306K	03W	Ø 70x40	Ø 58mm	>0.90	50pcs	₹200.00	● ● ○
CLCNP00606K	06W	Ø 95x47	Ø 70mm	>0.90	20pcs	₹265.00	● ● ○
CLCNP00806K	08W	Ø 106x48	Ø 80mm	>0.90	20pcs	₹270.00	● ● ○
CLCNP01206K	12W	Ø 140x57	Ø 116mm	>0.90	20pcs	₹495.00	● ● ○

Red, Green & Blue, Available on order with price difference.

Svelate



- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 50000 hours




ITEM CODE	WATTAGE	POWER FACTOR	DIMENSION L W H (mm)	DIMENSIONS Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLR1102406K	24W (1x1)	>0.90	295x295x10.5	280x280	10pcs	₹1850.00	● ● ○
CLR1203006K	30W (1x2)	>0.90	595x295x10.5	580x280	2pcs	₹2160.00	● ● ○
CLR2203606K	36W (2x2)	>0.90	595x595x10.5	580x580	2pcs	₹3270.00	● ● ○
CLR2204006K	40W(2x2)	>0.90	595x595x10.5	580x580	2pcs	₹3270.00	● ● ○

*Svelate is sleek, elegant design best quality of LGP and Diffuser for control lumen & better distribution of light.

*Svelate light to replace conventional 2X2 downlight.

Svelate - Backlit

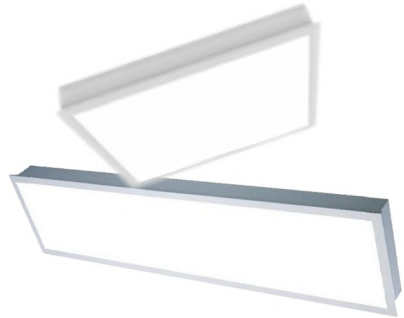

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 50000 hours



ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L W H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLB2203606K	36W (2x2)	90-300Vac, 50Hz	>0.90	595x595x61	2pcs	₹2275.00	● ● ○
CLB2204006K	40W (2x2)	90-300Vac, 50Hz	>0.90	595x595x61	2pcs	₹2275.00	● ● ○
CLR1403606K	36W (1x4)	90-300Vac, 50Hz	>0.90	1195x295x61	2pcs	₹2870.00	● ● ○
CLR1404006K	40W (1x4)	90-300Vac, 50Hz	>0.90	1195x295x61	2pcs	₹3130.00	● ● ○

*Svelate (Backlite) is made CRC housing with polycarbonate diffuser to get maximum lumen per watt (100-130lm/w).

Twinkle Slimo Star / Twinkle S



- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90-300Vac
- Long life : 25000 hours



CRI>80



System Lumen 100Lm/W



Input 90-300Vac



Surge Protection 4KV

ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSIONS Outer (LxH mm)	DIMENSIONS Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCE05	5W	90-300Vac, 50Hz	>0.90	Ø 110x27	Ø 80mm	100pcs	₹ 190.00	● ● ○
CLCE07	7W	90-300Vac, 50Hz	>0.90	Ø 110x35	Ø 75mm	50pcs	₹ 250.00	● ● ○
CLCEA12W	12W	90-300Vac, 50Hz	>0.90	Ø 111x45	Ø 75mm	20pcs	₹ 650.00	● ● ○
CLCEA15W	15W	90-300Vac, 50Hz	>0.90	Ø 111x45	Ø 75mm	20pcs	₹ 775.00	● ● ○

*Available in Aluminium diecast and Polycarbonate Housing.

Ginni - Button - Luna - Junction



- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Long life : 25000 hours



CRI>80



System Lumen 100-110Lm/W



Input 90-300Vac



Surge Protection Upto 4KV

ITEM CODE	WATTAGE	TYPE	DIMENSIONS Outer (LxH mm)	DIMENSIONS Cutout (mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLUM2W	02W	Ginni	Ø 42x16	Ø 33mm	>0.90	50pcs	₹ 225.00	● ● ○
CLUN3W	03W		Ø 41x16	Ø 35mm	>0.90	200pcs	₹ 250.00	● ● ○

CLTW03W	03W	Junction	Ø 80x37	Ø 44mm	>0.90	50pcs	₹ 180.00	● ● ○
CLTW03W	03W		Ø 80x37	Ø 44mm	>0.90	50pcs	₹ 190.00	● ● ○
CLGB2W	02W	Button	Ø 38x28	Ø 29mm	>0.90	50pcs	₹ 270.00	● ● ○
CLGL3W	03W	Luna	Ø 38x28	Ø 28mm	>0.90	50pcs	₹ 270.00	● ● ○

*Virgin Polycarbonate Housing (Unbreakable), Long Lasting Unfade Colour.

SURFACE MOUNTED SERIES

Lepus/Exotic Deep Down Light

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Long life : 25000 hours



*Virgin Polycarbonate Housing (Unbreakable), Long Lasting Unfade Colour.

ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Dia H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLLPS00606K	06W	220-240V,50Hz	>0.90	Ø 84x44	30pcs	₹ 355.00	● ● ●
CLLPS006RGB	06W	220-240V,50Hz	>0.90	Ø 84x44	30pcs	₹ 370.00	● ● ●
CLLPS01206K	12W	220-240V,50Hz	>0.90	Ø 141x45	30pcs	₹ 625.00	● ● ●
CLLPS012RGB	12W	220-240V,50Hz	>0.90	Ø 141x45	30pcs	₹ 655.00	● ● ●
CLLPS01506K	15W	220-240V,50Hz	>0.90	Ø 141x45	30pcs	₹ 680.00	● ● ●
CLLPS015RGB	15W	220-240V,50Hz	>0.90	Ø 141x45	30pcs	₹ 710.00	● ● ●
CLEXD01206K	12W	220-240V,50Hz	>0.90	Ø 120x51	20pcs	₹ 600.00	● ● ●
CLEXD01806K	18W	220-240V,50Hz	>0.90	Ø 150x61	20pcs	₹ 940.00	● ● ●

Lunar

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Long life : 25000 hours



*Virgin Polycarbonate Housing (Unbreakable), Long Lasting Unfade Colour.

ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Dia H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLLUR00606K	06W	220-240V,50Hz	>0.90	Ø 92x28	20pcs	₹ 315.00	● ● ●
CLLUR1206K	12W	220-240V,50Hz	>0.90	Ø 121x28	20pcs	₹ 510.00	● ● ●
CLLUR1806K	18W	220-240V,50Hz	>0.90	Ø 156x28	20pcs	₹ 795.00	● ● ●
CLLUR2206K	22W	220-240V,50Hz	>0.90	Ø 190x28	20pcs	₹ 1165.00	● ● ●

Crescent - Saturn

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours



*Virgin Polycarbonate Housing (Unbreakable), Long Lasting Unfade Colour.

ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Dia H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLSST00306K	03W	220-240V,50Hz	>0.90	Ø 68x14	50pcs	₹ 140.00	● ● ●
CLSST003RBP	03W	220-240V,50Hz	>0.90	Ø 68x14	50pcs	₹ 140.00	● ● ●
CLSST00706K	07W	220-240V,50Hz	>0.90	Ø 68x14	50pcs	₹ 370.00	● ● ●
CLSST007RBP	07W	220-240V,50Hz	>0.90	Ø 68x14	50pcs	₹ 400.00	● ● ●
CLCRS00606K	06W	220-240V,50Hz	>0.90	Ø 116x48	20pcs	₹ 235.00	● ● ●
CLCRS006RBP	06W	220-240V,50Hz	>0.90	Ø 116x48	20pcs	₹ 245.00	● ● ●

Estelle & EstelleFlower



- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- Glare Free

*Aluminium diecast Housing pressure for longer life.



ITEM CODE	WATTAGE	Shape	VOLTAGE	POWER FACTOR	DIMENSIONS (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLETR00606K	06W	Round	220-240Vac, 50Hz	>0.90	∅122x35	20pcs	₹ 600.00	● ● ●
CLETR00806K	08W		220-240Vac, 50Hz	>0.90	∅122x35	20pcs	₹ 710.00	● ● ●
CLETR01206K	12W		220-240Vac, 50Hz	>0.90	∅175x35	20pcs	₹ 825.00	● ● ●
CLETR01506K	15W		220-240Vac, 50Hz	>0.90	∅175x35	20pcs	₹ 1110.00	● ● ●
CLETR01806K	18W		220-240Vac, 50Hz	>0.90	∅ 228x35	10pcs	₹ 1180.00	● ● ●

CLETS00606K	06W	Square	220-240Vac, 50Hz	>0.90	122x122x35	20pcs	₹ 600.00	● ● ●
CLETS00806K	08W		220-240Vac, 50Hz	>0.90	122x122x35	20pcs	₹ 710.00	● ● ●
CLETS01206K	12W		220-240Vac, 50Hz	>0.90	175x175x35	20pcs	₹ 825.00	● ● ●
CLETS01506K	15W		220-240Vac, 50Hz	>0.90	175x175x35	20pcs	₹ 1110.00	● ● ●
CLETS01806K	18W		220-240Vac, 50Hz	>0.90	228x228x35	10pcs	₹ 1180.00	● ● ●

ITEM CODE	WATTAGE	Shape	VOLTAGE	POWER FACTOR	DIMENSIONS (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR CHARGING BY SWITCHING
CLETF006BGP	3+3W	Round	220-240Vac, 50Hz	>0.90	∅ 110x33	20pcs	₹ 525.00	PBG-CW=PBG+CW
CLETF009BGP	6+3W		220-240Vac, 50Hz	>0.90	∅ 150x33	20pcs	₹ 630.00	PBG-CW=PBG+CW
CLETF016BGP	12+4W		220-240Vac, 50Hz	>0.90	∅ 200x33	20pcs	₹ 925.00	PBG-CW=PBG+CW

COB DOWNLIGHT SERIES

SOL



- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- Beam Angle 38°



ITEM CODE	WATTAGE	DIMENSIONS Outer (LxH mm)	DIMENSIONS Cutout (mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCSOWH076K	07W	∅ 55x95	∅50mm	>0.90	20pcs	₹ 1020.00	● ● ●
CLCSOWH126K	12W	∅ 75x100	∅70mm	>0.90	20pcs	₹ 1275.00	● ● ●

*Aluminium diecast Housing.

SPICA DOWN LIGHT (3in1)

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours



ITEM CODE	WATTAGE	DIMENSIONS Outer (LxH mm)	DIMENSIONS Cutout (mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR CHARGING BY SWITCHING	COLOUR TEMPERATURE
CLSPC010RBP	10W	Ø 130x28	Ø 106mm	>0.90	20pcs	₹ 510.00	<input type="checkbox"/>	<input type="radio"/>
CLSPC010RBP	15W	Ø 160x29	Ø 138mm	>0.90	20pcs	₹ 600.00	<input type="checkbox"/>	<input type="radio"/>

* 6500K/4000K/3000K in one light

Lyra

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Long life : 25000 hours
- Virgin Polycarbonate Housing (Unbreakable), Long Lasting Unfade Colour.



ITEM CODE	WATTAGE	DIMENSIONS Outer (LxH mm)	DIMENSIONS Cutout (mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLLYR00606K	06W	Ø 85X64	Ø 48mm	>0.90	50pcs	₹ 290.00	<input type="radio"/>
CLLYR00606K	06W	Ø 85X64	Ø 48mm	>0.90	50pcs	₹ 300.00	<input type="radio"/>
CLLYR01206K	12W	Ø 138x65	Ø 44mm	>0.90	30pcs	₹ 525.00	<input type="radio"/>
CLLYR01506K	15W	Ø 141X57	Ø 83mm	>0.90	30pcs	₹ 540.00	<input type="radio"/>
CLLYR01506K	15W	Ø 141X57	Ø 83mm	>0.90	30pcs	₹ 565.00	<input type="radio"/>

TWINKLE TRIO

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- Virgin Polycarbonate Housing



ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSIONS Outer (LxH mm)	DIMENSIONS Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR CHARGING BY SWITCHING
CLTDS00303(CCT)	3W	220-240V,50Hz	>0.90	Ø 110x27	Ø 80mm	50pcs	₹ 250.00	<input type="radio"/>
CLTDS00303(RBP)	3W	220-240V,50Hz	>0.90	Ø 110x27	Ø 80mm	50pcs	₹ 250.00	<input type="radio"/>
CLTDS00303(SBS)	3W	220-240V,50Hz	>0.90	Ø 110x27	Ø 80mm	50pcs	₹ 250.00	<input type="radio"/>

TRACK & SURFACE SERIES

Aries New

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- Beam Angle 24°/38°/40°/60°



CRI>80



System Lumen
100-110Lm/W



Input
90~300Vac



Surge Protection
4KV

ITEM CODE	WATTAGE	DIMENSIONS Outer (mm)	Shape	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLASTWH106K	10W	∅ 50x126	Track	20pcs	₹ 1210.00	● ● ● ○
CLASTWH206K	20W	∅ 67x156		20pcs	₹ 1465.00	● ● ● ○
CLASTWH306K	30W	∅ 76x180		20pcs	₹ 1905.00	● ● ● ○

CLASTWH106K	10W	50x126	Surface	20pcs	₹ 1210.00	● ● ● ○
CLASTWH206K	20W	67x156		20pcs	₹ 1465.00	● ● ● ○
CLASTWH306K	30W	76x180		20pcs	₹ 1905.00	● ● ● ○

Fressia Magnetic



CRI>80-90



System Lumen
100-110Lm/W



Surge Protection
Upto 4KV



Magnetic track is a modular rail System for Surface mounting, recessed or suspended.

A varied range Top spots with adapters, can easily be clicked anywhere on the track to a brilliant magnetic System.

Magnetic track Lights are less disturbing, used in retail space, shop window, showrooms & homes.

The Light inserts can be easily plugged, Unplugged and positioned with in the track profile without any mechanical latching.

This ensured versatility of lighting arrangements as the mounting of each light inserts can be changes quickly

ITEM CODE	WATTAGE	TYPE	DIMENSION Outer (mm)	BEAM ANGLE	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLFTR00706K	07W	TRACK LIGHT	∅45X95	38°	₹4300.00	●
CLFTS00706K	07W	HANGING SPOT	40x400 (WIRE-710)	38°	₹4700.00	●
CLFTR00806K	08W	LINEAR LIGHT	20X305	120°	₹5000.00	●
CLFTR01006K	10W	WALL WASHER	20X125	50°	₹5500.00	●
CLFTR01206K	12W	LAZER BLADE LIGHT	20X250	50°	₹6000.00	●

NORA COB

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 50000 hours
- Aluminium diecast Housing
- Beam Angle 38°



CRI > 80-90
 System Lumen 100-110Lm/W
 Input 90~300Vac
 Surge Protection 4KV

ITEM CODE	WATTAGE	DIMENSIONS Outer (LxH mm)	DIMENSIONS Cutout (mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCNRWS076K	07W	Ø 65x55	Ø53mm	>0.90	20pcs	₹ 775.00	● ● ○
CLCNRWS126K	12W	Ø 80x60	Ø 68mm	>0.90	20pcs	₹ 845.00	● ● ○
CLCNRWS186K	18W	Ø 100x68	Ø 83mm	>0.90	20pcs	₹ 1355.00	● ● ○

*Available in SL, Matt BK, GBK & White color reflector.

SIGMA COB

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 50000 hours
- Aluminium diecast Housing
- Beam Angle 38°



CRI > 80-90
 System Lumen 100-110Lm/W
 Input 90~300Vac
 Surge Protection 4KV

ITEM CODE	WATTAGE	DIMENSIONS Outer (LxH mm)	DIMENSIONS Cutout (mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCSGWH206K	20W	Ø 110x100	Ø95mm	>0.90	20pcs	₹ 1565.00	● ● ○
CLCSGWH306K	30W	Ø 135x110	Ø 115mm	>0.90	20pcs	₹ 1705.00	● ● ○

Aelius

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 50000 hours
- Beam Angle 40-50°



CRI > 80
 System Lumen 100-110Lm/W
 Input 90~300Vac
 Surge Protection Upto 4KV

*Aluminium die cast Housing.

ITEM CODE	WATTAGE	POWER FACTOR	DIMENSIONS Outer (LxH mm)	DIMENSION Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCALI0076K	07W	>0.90	Ø 89x48	75mm	20pcs	₹ 1250.00	● ● ○
CLCALI0126K	12W	>0.90	Ø 120x65	95mm	20pcs	₹ 1280.00	● ● ○
CLCALI0206K	20W	>0.90	Ø 148x82	120mm	20pcs	₹ 1990.00	● ● ○
CLCALI0356K	35W	>0.90	Ø 210x95	183mm	20pcs	₹ 2985.00	● ● ○
CLCALI0506K	50W	>0.90	Ø 230x120	190mm	20pcs	₹ 4265.00	● ● ○

COB DOWNLIGHT SERIES

Super Nova

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 50000 hours
- Aluminium diecast Housing
- Beam Angle 38°



CRI > 80-90
 System Lumen 100-110Lm/W
 Surge Protection 4KV

ITEM CODE	WATTAGE	POWER FACTOR	DIMENSIONS Outer (LxH mm)	DIMENSION Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCSNWH076K	07W	>0.90	∅ 63x60	∅ 50mm	20pcs	₹ 715.00	
CLCSNWH126K	12W	>0.90	∅ 85x80	∅ 75mm	20pcs	₹ 825.00	
CLCSNWH186K	18W	>0.90	∅ 95x100	∅ 80mm	20pcs	₹ 1225.00	

LITA COB

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 50000 hours
- Aluminium diecast Housing
- Beam Angle 38°



CRI > 80
 System Lumen 100-110Lm/W
 Input 90~300Vac
 Surge Protection 4KV

ITEM CODE	WATTAGE	DIMENSIONS Outer (DxH mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLLSRWR076K	07W	∅ 68x82	>0.90	20pcs	₹ 1085.00	
CLLSRWR126K	12W	∅ 72x95	>0.90	20pcs	₹ 1280.00	
CLLSRWR186K	18W	∅ 88x105	>0.90	20pcs	₹ 1755.00	

*Available in SL, Matt CK, RGD, GBK & White color reflector.

ZIVA/CELO/TERO COB

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 50000 hours
- Aluminium diecast Housing
- Beam Angle 38°




CRI > 80
 System Lumen 100-110Lm/W
 Input 90~300Vac
 Surge Protection 4KV

ITEM CODE	WATTAGE	DIMENSIONS Outer (LxH mm)	DIMENSIONS Cutout (mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCZVWH036K	03W	∅ 38x30	∅ 30mm	>0.90	50pcs	₹ 535.00	
CLCLOBK036K	03W	∅ 30x67	∅ 25mm	>0.90	50pcs	₹ 780.00	
CLCTRWH036K	03W	∅ 35x58	∅ ---	>0.90	50pcs	₹ 780.00	

Fresco

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 50000 hours
- Aluminium diecast Housing
- Beam Angle 38°

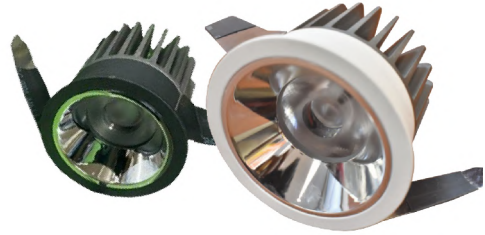

ITEM CODE	WATTAGE	POWER FACTOR	DIMENSIONS Outer (LxH mm)	DIMENSION Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCFCWH076K	07W	>0.90	Ø71.5x69	Ø62mm	20pcs	₹ 1600.00	● ● ○
CLCFCWH126K	12W	>0.90	Ø87x72	Ø77mm	20pcs	₹ 2555.00	● ● ○

LUNA COB

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 50000 hours
- Aluminium diecast Housing
- Beam Angle 38°



ITEM CODE	WATTAGE	DIMENSIONS Outer (LxH mm)	DIMENSIONS Cutout (mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCLNBK066K	6W	Ø69x30x36	Ø25x65mm	>0.90	30pcs	₹ 740.00	● ● ○
CLCLNBK126K	12W	Ø125x30x36	Ø120x25mm	>0.90	30pcs	₹ 800.00	● ● ○

NEPO COB

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 50000 hours
- Aluminium diecast Housing
- Beam Angle 38°



ITEM CODE	WATTAGE	DIMENSIONS Outer (LxH mm)	DIMENSIONS Cutout (mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCNOWG076K	7W	Ø65x75	Ø55mm	>0.90	20pcs	₹ 960.00	● ● ○
CLCNOWG126K	12W	Ø85x95	Ø75mm	>0.90	20pcs	₹ 1125.00	● ● ○

FLOOD LIGHT & CANOPY SERIES

Diamond

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Long life : 30000 hours
- IP66
- Best for long distance.



ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L W H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLDMF01006K	10W	220-240V,50Hz	>0.90	115x110x35	20pcs	₹ 855.00	● ● ●
CLDMF010RGB	10W	220-240V,50Hz	>0.90	115x110x35	20pcs	₹ 855.00	● ● ●
CLDMF02006K	20W	220-240V,50Hz	>0.90	115x110x35	10pcs	₹ 1140.00	● ● ●
CLDMF020RGB	20W	220-240V,50Hz	>0.90	115x110x35	10pcs	₹ 1140.00	● ● ●
CLDMF03006K	30W	220-240V,50Hz	>0.90	115x145x35	10pcs	₹ 1210.00	● ● ●
CLDMF030RGB	30W	220-240V,50Hz	>0.90	115x145x35	10pcs	₹ 1280.00	● ● ●
CLDMF05006K	50W	220-240V,50Hz	>0.90	194x229x50	5pcs	₹ 2415.00	● ● ●
CLDMF050RGB	50W	220-240V,50Hz	>0.90	194x229x50	5pcs	₹ 2630.00	● ● ●
CLDMF10006K	100W	220-240V,50Hz	>0.90	270x282x60	5pcs	₹ 4410.00	● ● ●
CLDMF15006K	150W	220-240V,50Hz	>0.90	282x344x70	5pcs	₹ 8245.00	● ● ●
CLDMF20006K	200W	220-240V,50Hz	>0.90	420x320x90	2pcs	₹ 8530.00	● ● ●
CLDMF30006K	300W	220-240V,50Hz	>0.90	285x300x142	1pc	₹ 15640.00	● ● ●

Platinum & Platinum Slimo Ultra

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Long life : 25000 hours
- IP66
- Best for wide area coverage.



ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L W H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLPTF03006K	30W	220-240V,50Hz	>0.90	175x184x44	10pcs	₹ 1565.00	● ● ●
CLPTF05006K	50W	220-240V,50Hz	>0.90	200x216x44	10pcs	₹ 1905.00	● ● ●
CLPTF10006K	100W	220-240V,50Hz	>0.90	274x284x44	5pcs	₹ 3155.00	● ● ●
CLPTF30006K	200W	220-240V,50Hz	>0.90		5pcs	₹ 6115.00	● ● ●
CLSUF03006K	30W	220-240V,50Hz	>0.90	145x119x23mm	40pcs	₹ 980.00	● ● ●
CLSUF05006K	50W	220-240V,50Hz	>0.90	205x156x30mm	20pcs	₹ 1420.00	● ● ●
CLSUF10006K	100W	220-240V,50Hz	>0.90	270x205x30mm	20pcs	₹ 2475.00	● ● ●
CLSUF20006K	200W	220-240V,50Hz	>0.90	378x279x30mm	10pcs	₹ 4960.00	● ● ●
CLSUF30006K	300W	220-240V,50Hz	>0.90	425x315x30mm	10pcs	₹ 6965.00	● ● ●

Turbo New

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 50000 hours
- Aluminium diecast Housing
- Beam Angle 38°



CRI > 80



System Lumen
100-110Lm/W



Input
90-300Vac



Surge Protection
4KV

ITEM CODE	WATTAGE	DIMENSIONS Outer (DxH mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLTSRBR076K	07W	Ø 58x72	>0.90	20pcs	₹ 900.00	● ● ○
CLTSRBR126K	12W	Ø 72x88	>0.90	20pcs	₹ 1030.00	● ● ○
CLTSRBR186K	18W	Ø 88x100	>0.90	20pcs	₹ 1335.00	● ● ○

*Available in SL, Matt CK, RGD, GBK & White color reflector.

Tubo

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 50000 hours
- Aluminium diecast Housing
- Beam Angle 38°



CRI > 80



System Lumen
100-110Lm/W



Input
90-300Vac



Surge Protection
4KV

ITEM CODE	WATTAGE	DIMENSIONS Outer (DxH mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCTBWH126K	12W	Ø 162x55	>0.90	20pcs	₹ 2015.00	● ● ○

Turbo

Turbo cylindrical surface mounted COB downlight with extruded aluminium housing & die casted heat sink. It has high power COB & reflector for better light distribution suitable for retail, hospitality & residential application area.



CRI > 80



System Lumen
100-110Lm/W



Surge Protection
4KV

ITEM CODE	WATTAGE	VOLTAGE	TYPE	DIMENSION Ø/H(mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLTSP00806K	08W	220-240V,50Hz	SUSPENDED	Ø 63X185	>0.90	20pcs	₹ 1595.00	● ● ○
CLTSP01206K	12W	220-240V,50Hz		Ø 88X200	>0.90	20pcs	₹ 2220.00	● ● ○
CLTSP01806K	18W	220-240V,50Hz		Ø 63X185	>0.90	20pcs	₹ 2915.00	● ● ○
CLTSR00806K	08W	220-240V,50Hz	SURFACE	Ø 63X185	>0.90	20pcs	₹ 1410.00	● ● ○
CLTSR01206K	12W	220-240V,50Hz		Ø 88X200	>0.90	20pcs	₹ 2005.00	● ● ○
CLTSR01806K	18W	220-240V,50Hz		Ø 63X185	>0.90	20pcs	₹ 2675.00	● ● ○

Ophelia

- Long life & photobiologically safe power LED Osram/Citizen/bridgelux.
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 120- 300Vac
- Long life : 50000 hours
- IP66
- BEAM ANGLE 90°



Available in 2 years / 3 years / 5 years warranty on demand.

ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L W H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLFD50WLEN	50W	120-300Vac, 50Hz	>0.90	185x143x102	5pcs	₹ 5400.00	● ● ○
CLFD100WLEN	100W	120-300Vac, 50Hz	>0.90	287x230x145	5pcs	₹ 11000.00	● ● ○
CLFD150WLEN	150W	120-300Vac, 50Hz	>0.90	280x228x159	2pcs	₹ 22000.00	● ● ○
CLFD200WLEN	200W	120-300Vac, 50Hz	>0.90	260x265x125	1pc	₹ 27000.00	● ● ○
CLFD300WLEN	300W	120-300Vac, 50Hz	>0.90	425x328x178	1pc	₹ 30000.00	● ● ○
CLFD400WLEN	400W	120-300Vac, 50Hz	>0.90	515x228x178	1pc	₹ 35000.00	● ● ○

*Also available in 15°, 40°, 60°, & 100° Beam angle on demand

Diamond NEO

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Long life : 30000 hours
- IP66
- Best for long distance.



ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L W H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLNEF05006K	50W	220-240V, 50Hz	>0.90	180x176x46	5pcs	₹ 1765.00	● ● ○
CLNEF10006K	100W	220-240V, 50Hz	>0.90	222x216x46	5pcs	₹ 2660.00	● ● ○
CLNEF20006K	200W	220-240V, 50Hz	>0.90		5pcs		● ● ○

*External surge 10KV & 20KV On Demand in Floodlight & Streetlight

Sinope

- Long life & photobiologically safe power LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 50000 hours



*Warranty on Demand 2 years / 3years / 5 years

ITEM CODE	WATTAGE	POWER FACTOR	BEAM ANGLE	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCFEL50W	50W	>0.90	120°	20pcs	₹ 10500.00	● ● ○
CLCFEL60W	60W	>0.90	120°	20pcs	₹ 12500.00	● ● ○
CLCFEL80W	80W	>0.90	120°	20pcs	₹ 14500.00	● ● ○

Sinope application is for Petrol pumps & Gas filling stations.

STREET LIGHT SERIES

Splendor Plus

- Long life & photobiologically power LED Osram/Citizen/bridgelux.
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Long life : 50000 hours
- IP66

*Heavy Aluminium die cast Housing for longer life.



ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L W H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLT50WSTN	50W		>0.90	332x140x86	5pcs	₹ 6500.00	● ● ● ○
CLT70WSTN	70W		>0.90	400x195x100	5pcs	₹ 7000.00	● ● ● ○
CLT90WSTN	90W		>0.90	400x195x100	5pcs	₹ 7200.00	● ● ● ○
CLT100WSTN	100W		>0.90	400x195x100	5pcs	₹ 7500.00	● ● ● ○
CLT120WSTN	120W		>0.90	400x195x100	5pcs	₹ 8500.00	● ● ● ○
CLT150WSTN	150W		>0.90	400x195x100	2pcs	₹ 10500.00	● ● ● ○
CLT200WSTN	200W		>0.90	425x200x100	5pcs	₹ 25000.00	● ● ● ○
CLT200WSTN	250W		>0.90	425x200x100	2pcs	₹ 30000.00	● ● ● ○

Rigel

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Long life : 25000 hours
- IP66



ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L W H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLRLS02006K	20W	220-240V,50Hz	>0.90	282x120x47	10pcs	₹ 1255.00	● ● ● ○
CLRLS03006K	30W	220-240V,50Hz	>0.90	308x126x47	10pcs	₹ 1720.00	● ● ● ○
CLRLS05006K	50W	220-240V,50Hz	>0.90	405x144x54	10pcs	₹ 2345.00	● ● ● ○
CLRLS07006K	70W	220-240V,50Hz	>0.90	530x185x63	10pcs	₹ 2745.00	● ● ● ○
CLRLS10006K	100W	220-240V,50Hz	>0.90	530x185x63	10pcs	₹ 3895.00	● ● ● ○

Estrells



- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 120-300Vac
- Long life : 30000 hours
- IP66



ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L W H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLT24WSTN	24W	120-300Vac, 50Hz	>0.90	332x97x66	5pcs	₹ 2700.00	● ● ○
CLT30WSTN	30W	120-300Vac, 50Hz	>0.90	332x97x66	5pcs	₹ 3500.00	● ● ○
CLT40W	40W	120-300Vac, 50Hz	>0.90	372x150x72	5pcs	₹ 4500.00	● ● ○
CLT45W	45W	120-300Vac, 50Hz	>0.90	372x150x72	5pcs	₹ 4800.00	● ● ○
CLT50W	50W	120-300Vac, 50Hz	>0.90	372x150x72	5pcs	₹ 5000.00	● ● ○
CLT70W	70W	120-300Vac, 50Hz	>0.90	410x192x68	2pcs	₹ 6000.00	● ● ○
CLT90W	90W	120-300Vac, 50Hz	>0.90	410x192x68	5pcs	₹ 6500.00	● ● ○
CLT100W	100W	120-300Vac, 50Hz	>0.90	410x192x68	5pcs	₹ 6500.00	● ● ○

Maxo Street Light



- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90-300Vac
- Long life : 25000 hours



ITEM CODE	WATTAGE	DIMENSION L W H (mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLMXS02006K	20W	305x48x96	>0.90	10pcs	₹ 1095.00	● ● ○
CLMXS02406K	24W	305x48x96	>0.90	10pcs	₹ 1140.00	● ● ○

HIGHBAY LIGHT SERIES

Lexa

- Long life & photobiologically power LED Osram/Citizen/bridgelux.
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Long life : 50000 hours
- IP65



*Lexa UFO High Bay replaces conventional MHL, CFL & HPS light and save energy more then 70-80% compare to conventional light.

ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Dia H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLUFO05006K	50W	220-240V,50Hz	>0.90	Ø352x175	1pc	₹ 6505.00	● ● ○
CLUFO10006K	100W	220-240V,50Hz	>0.90	Ø277x175	1pc	₹ 10165.00	● ● ○
CLUFO15006K	150W	220-240V,50Hz	>0.90	Ø318x190	1pc	₹ 13155.00	● ● ○
CLUFO20006K	200W	220-240V,50Hz	>0.90	Ø360x190	1pc	₹ 17340.00	● ● ○

Note : Higher lumen higher guarantee product price on demand

Beacon

- Long life & photobiologically power LED Osram/Citizen/bridgelux.
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 120- 300Vac
- Long life : 50000 hours
- IP54



*Beacon, save 70-80% energy compared to metal halide sodium - High pressure conventional light.

ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Dia H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLBCH10006K	100W	220-240V,50Hz	>0.90	Ø395x380	1pc	₹ 12285.00	● ● ○
CLBCH15006K	150W	220-240V,50Hz	>0.90	Ø450x420	1pc	₹ 15490.00	● ● ○
CLBCH20006K	200W	220-240V,50Hz	>0.90	Ø500x420	1pc	₹ 24040.00	● ● ○

Neptune

Neptune is an Innovative Led well glass luminare for direct replacement of 100W conventional fixture. Neptune save up to 60% of Electricity without compromising. Lightning parameters in existing installation. IP65



ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	LUMEN	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLNWX03606K	36W	220-240V,50Hz	>0.90	4320lm	20pcs	₹ 2135.00	● ● ○
CLNWX05006K	50W	220-240V,50Hz	>0.90	6000lm	20pcs	₹ 2985.00	● ● ○

Rigelalia



- Long life : 25000 hours
- In-built surge protection of 6 kV
- Lumens Efficacy range lies between (≥ 110 to < 120) lm/W
- Up to 4hrs backup after fully charge
- Internal lithium ion battery need 4-5 hours in to charge for fit to last up to 4 hours on battery.
- Lithium ion battery will charge when light switch ON.
- In case battery completely Drained keep switch on for 2-3 hours to charge battery.



ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L W H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLRGS02006K	20W	220-240V,50Hz	>0.90	332x97x66	10pcs	₹ 1446.00	● ● ○
CLRGS03006K	30W	220-240V,50Hz	>0.90	332x97x66	10pcs	₹ 1706.00	● ● ○
CLRGS05006K	50W	220-240V,50Hz	>0.90	372x150x72	10pcs	₹ 2226.00	● ● ○
CLRGS10006K	100W	220-240V,50Hz	>0.90	372x150x72	10pcs	₹ 2960.00	● ● ○

Emergency Night Tornado



- Long life : 25000 hours
- In-built surge protection of 6 kV
- Lumens Efficacy range lies between (≥ 110 to < 120) lm/W
- Up to 4hrs backup after fully charge
- Internal lithium ion battery need 4-5 hours in to charge for fit to last up to 4 hours on battery.
- Lithium ion battery will charge when light switch ON.
- In case battery completely Drained keep switch on for 2-3 hours to charge battery.



ITEM CODE	WATTAGE	DIMENSION L W H (mm)	POWER FACTOR	AC LUMEN	DC LUMEN	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLINT01206K	12W	275x67x40mm	>0.90	1800	900	10pcs	₹ 850.00	● ● ○

*Aluminium diecast Housing .

Eros



- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to $+45^{\circ}$ C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- PC Body for long durability.
- IP65




ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L W H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLBNT01006K	10W	220-240V,50Hz	>0.90	172x73x46	20pcs	₹ 315.00	● ● ○
CLBNT02006K	20W	220-240V,50Hz	>0.90	212x103x60	20pcs	₹ 460.00	● ● ○

LINEAR SERIES

Linear


- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 50000 hours

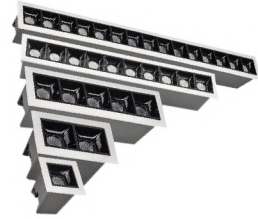

ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L W H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLLRC00306K	03W	220-240V,50Hz	>0.90	74x56x56	20pcs	₹ 1180.00	● ● ○
CLLRC00906K	09W	220-240V,50Hz	>0.90	132x56x56	20pcs	₹ 2420.00	● ● ○
CLLRC01506K	15W	220-240V,50Hz	>0.90	207x56x56	20pcs	₹ 3270.00	● ● ○
CLLRC02506K	25W	220-240V,50Hz	>0.90	397x56x56	20pcs	₹ 4125.00	● ● ○

Linus

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 50000 hours
- Profile can be customise

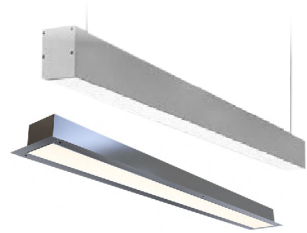


*Aluminium diecast Housing & Virgin Polycarbonate diffuser for better Distribution of light.

ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L W H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLLNS03606K	36W	220-240V,50Hz	>0.90	1185x53x80	1pc	₹ 4410.00	● ● ○
CLLNR04006K	40W	220-240V,50Hz	>0.90	1185x53x80	1pc	₹ 4690.00	● ● ○

*Aluminium diecast Housing .

Hexa - Nurmo




ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L W H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLHNS03006K	30W	220-240V,50Hz	>0.90	609x307x60	20pcs	₹ 13080.00	● ● ○
CLHNS04006K	40W	220-240V,50Hz	>0.90	672x582x60	20pcs	₹ 14215.00	● ● ○

ROPE & STRIP LIGHT SERIES

Glitter

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Long life : 30000 hours
- LED 2835-120LED/mtr
- IP65

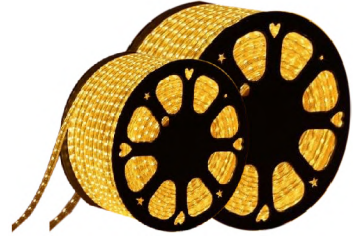


*Clair Glitter ropes are made using SMD Led Strips and are encased inside a protective PVC Casing. The design and housing allow for easy shaping & bending of lights.

ITEM CODE	WATTAGE (PER MTR)	VOLTAGE	POWER FACTOR	STANDARD KPT/MTR	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLSTD220V-2835WH	10W / mtr	120-300Vac, 50Hz	>0.90	50mtr x 3 per box	₹ 198.00/mtr	☀️ ☀️ ☀️
CLSTD220V-2835WW	10W / mtr	120-300Vac, 50Hz	>0.90	50mtr x 3 per box	₹ 198.00/mtr	🌈 🌈 🌈
CLSTD220V-2835NW	10W / mtr	120-300Vac, 50Hz	>0.90	50mtr x 3 per box	₹ 198.00/mtr	🌈 🌈 🌈
CLSTD220V-2835RD	10W / mtr	120-300Vac, 50Hz	>0.90	50mtr x 3 per box	₹ 198.00/mtr	☀️ ☀️ ☀️
CLSTD220V-2835AMB	10W / mtr	120-300Vac, 50Hz	>0.90	50mtr x 3 per box	₹ 198.00/mtr	🌈 🌈 🌈
CLSTD220V-2835GR	10W / mtr	120-300Vac, 50Hz	>0.90	50mtr x 3 per box	₹ 198.00/mtr	🌈 🌈 🌈
CLSTD220V-2835OCB	10W / mtr	120-300Vac, 50Hz	>0.90	50mtr x 3 per box	₹ 198.00/mtr	☀️ ☀️ ☀️
CLSTD220V-2835PK	10W / mtr	120-300Vac, 50Hz	>0.90	50mtr x 3 per box	₹ 198.00/mtr	🌈 🌈 🌈
CLSTD220V-2835BL	10W / mtr	120-300Vac, 50Hz	>0.90	50mtr x 3 per box	₹ 198.00/mtr	🌈 🌈 🌈
CLSTD220-2835WH	10W / mtr	120-300Vac, 50Hz	>0.90	20mtr x 3 per box	₹ 202.00/mtr	🌈 🌈 🌈
Connector	----	120-300Vac, 50Hz	>0.90		₹ 125.00 per pcs.	

* 100 Meter lenth available on demand

Sparkle

- Beam Angle: 120°
- Mounting Adhesive
- Dimmable : Yes
- Environmental : Indoor/Dry Location
- Strip LED 2835

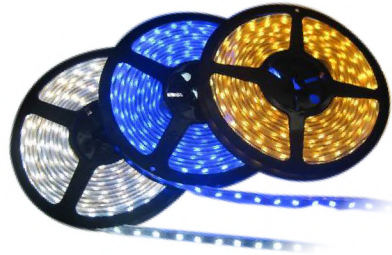

*Flexible LED strip light made of bright LED chip high quality thermal PCB board and an unmatched quality process. IP20 Product



ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	LUMEN	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLST12VB60L	20W/Roll	120-300Vac, 50Hz	>0.90	2000lm	50 Roll / Box	₹ 1050.00	☀️ ☀️ ☀️
CLST12VB120L	35W/Roll	120-300Vac, 50Hz	>0.90	3500lm	50 Roll / Box	₹ 1850.00	☀️ ☀️ ☀️
CLST12VB180L	54W/Roll	120-300Vac, 50Hz	>0.90	5400lm	50 Roll / Box	₹ 2250.00	☀️ ☀️ ☀️
CLST12VB240L	75W/Roll	120-300Vac, 50Hz	>0.90	7500lm	50 Roll / Box	₹ 3250.00	☀️ ☀️ ☀️

Available in Red, Blue, Green, Ocean Blue, Amber & Pink color. IP65 will available on demand

DRIVER SERIES

Sparkle SMPS




- CRC housing & Polycarbonate housing
- Constant current output
- Working on 90 voltage to 300 voltage
- Output voltage : 12V for 5 meter led strips



ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	AMPERE	STANDARD PACKING	LIST PRICE (₹ Per Unit)
CLSMPS2	24W	120-300Vac, 50Hz	>0.90	2A	20pcs	₹ 700.00
CLSMPS3	36W	120-300Vac, 50Hz	>0.90	3A	20pcs	₹ 900.00
CLSMPS5	60W	120-300Vac, 50Hz	>0.90	5A	20pcs	₹ 1300.00
CLSMPS8	100W	120-300Vac, 50Hz	>0.90	8A	20pcs	₹ 1600.00
CLSMPS10	120W	120-300Vac, 50Hz	>0.90	10A	20pcs	₹ 1900.00

Sparkle

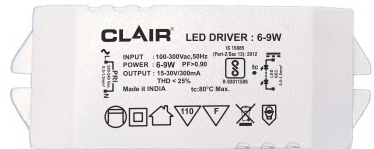

- CRC housing & Polycarbonate housing
- Constant current output
- Working on 90 voltage to 300 voltage



ITEM CODE	WATTAGE	Housing Type	VOLTAGE	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)
CLCCPS03W	03W	PC - Cabinet	120-300Vac, 50Hz	>0.90	20pcs	₹ 200.00
CLCCPS06W	06W	PC - Cabinet	120-300Vac, 50Hz	>0.90	20pcs	₹ 250.00
CLCCPS09W	09W	PC - Cabinet	120-300Vac, 50Hz	>0.90	20pcs	₹ 250.00
CLCCPS12W	12W	PC - Cabinet	120-300Vac, 50Hz	>0.90	20pcs	₹ 250.00
CLCCPS15W	15W	PC - Cabinet	120-300Vac, 50Hz	>0.90	20pcs	₹ 300.00
CLCCPS20W	18-20W	PC - Cabinet	120-300Vac, 50Hz	>0.90	20pcs	₹ 350.00
CLCCPS30WAL	30W	AL-PT-Cabinet	120-300Vac, 50Hz	>0.90	20pcs	₹ 550.00
CLCCPS40WAL	40W	AL-PT-Cabinet	120-300Vac, 50Hz	>0.90	20pcs	₹ 550.00
CLCCPS24WST	24W	CRC	120-300Vac, 50Hz	>0.90	20pcs	₹ 400.00
CLCCPS30WST	30W	CRC	120-300Vac, 50Hz	>0.90	20pcs	₹ 450.00
CLCCPS45WST	45W	CRC	120-300Vac, 50Hz	>0.90	20pcs	₹ 500.00
CLCCPS50WST	50W	CRC	120-300Vac, 50Hz	>0.90	20pcs	₹ 550.00
CLCCPS30WFL	30W	CRC	120-300Vac, 50Hz	>0.90	20pcs	₹ 450.00
CLCCPS50WFL	50W	CRC	120-300Vac, 50Hz	>0.90	20pcs	₹ 500.00

Constant Current Driver Suitable for - Downlights, COB Light, Flood Light, Street Light, Highbay Light.

INDUSTRIAL & OUTDOOR SERIES

CruX



IP 65 LED bollard is suitable for landscape stabilized lighting applications Luminaire is made of high grade corrosion resistant powder coated aluminium body with UV stabilized vandal proof PC diffuser.

ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø H (mm)	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCRBD09W	09W	90-300Vac, 50Hz	>0.90	594x70x25	₹ 8200.00	● ● ●



Allur



IP 65 LED bollard is suitable for landscape stabilized lighting applications Luminaire is made of high grade corrugaon resistant powder coated aluminium body with UV stabilized vandal proof PC diffuser.

ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø H (mm)	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLARBD10W	10W	90-300Vac, 50Hz	>0.90	Ø122x600	₹ 6500.00	● ● ●



Lynx



IP 65 LED bollard is suitable for landscape stabilized lighting applications Luminaire is made of high grade corrugaon resistant powder coated aluminium body with UV stabilized vandal proof PC diffuser.

ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø H (mm)	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLLY10W	10W	90-300Vac, 50Hz	>0.90	Ø175x600	₹ 7500.00	● ● ●



Vela



IP 65 LED bollard is suitable for landscape stabilized lighting applications Luminaire is made of high grade corrugaon resistant powder coated aluminium body with UV stabilized vandal proof PC diffuser.

ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø H (mm)	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLVLBD15W	15W	90-300Vac, 50Hz	>0.90	Ø218x600	₹ 11000.00	● ● ●



Canis



IP 67 in ground LED luminaire die cast housing stainless steel cover, anti-corrosion resistant, tempered clear glass with optical lens & Integrated driver.

ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø H (mm)	DIMENSIONS Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCAN01W	01W	220-240V,50Hz	>0.90	Ø49x90.5	Ø45.8	10pcs	₹ 2135.00	● ● ○

Taurus



IP 67 in ground LED luminaire die cast housing stainless steel cover, anti-corrosion resistant, tempered clear glass with optical lens & Integrated driver.

ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø H (mm)	DIMENSIONS Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLTAU03W	03W	220-240V,50Hz	>0.90	Ø 83.8x129.4	Ø 77.8	5pcs	₹ 2060.00	● ● ○
CLTAU09W	09W	220-240V,50Hz	>0.90	Ø 83.8x129.4	Ø 77.8	5pcs	₹ 3200.00	● ● ○
CLTAU12W	12W	220-240V,50Hz	>0.90	Ø 125.5x129.5	Ø 118	5pcs	₹ 5400.00	● ● ○
CLTAU15W	15W	220-240V,50Hz	>0.90	Ø 154.8x152	Ø 148.5	5pcs	₹ 7040.00	● ● ○
CLTAU18W	18W	220-240V,50Hz	>0.90	Ø 154.8x152	Ø 148.5	5pcs	₹ 10235.00	● ● ○

Gimy



Post top fixture for pole mounted application Aluminium housing with corrosion resistant powder coat and UV stabilised vandal proof milky diffuser, IP65 protection suitable for outdoor application.

ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø H (mm)	DIMENSIONS Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLJMY30W	30W	220-240V,50Hz	>0.90	Ø 575x370	Ø 775	1pc	₹ 10235.00	● ● ○
CLJMY60W	60W	220-240V,50Hz	>0.90	Ø 575x370	Ø 775	1pc	₹ 10235.00	● ● ○

Cetus



IP 65 Lamp Post is suitable for outdoor lighting applications. Luminaire is made in spin aluminium housing with corrosion resistant powder coated and UV stabilized vandal proof clear PC diffuser.

ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø H (mm)	POLE DIA (mm)	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCET45W	45W	120-300Vac, 50Hz	>0.90	Ø 450x680	69	₹ 20500.00	

Atik



IP 65 Lamp Post is suitable for outdoor lighting applications Luminaire is made in die-cast aluminium housing with corrosion resistant powder coated and UV stabilized vandal proof PC diffuser.

ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø H (mm)	POLE DIA (mm)	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLAT145W	45W	120-300Vac, 50Hz	>0.90	315x315x690	78	₹ 25000.00	

Iglow



IP 65 Lamp Post is suitable for outdoor lighting applications Luminaire is made in spin aluminium housing with corrosion resistant powder coated and UV stabilized vandal proof clear PC diffuser.

ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLIG50W	50W	120-300Vac, 50Hz	>0.90	Ø 625x650	1pc	₹ 20000.00	

Rean

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- IP65



ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L W H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLRN100506K	05W	220-240V,50Hz	>0.90	81x78x54	10pcs	₹ 740.00	● ● ○
CLRN201006K	10W	220-240V,50Hz	>0.90	147x78x54	10pcs	₹ 945.00	● ● ○

Exter

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Long life : 25000 hours
- IP65



ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Dia H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLXTR00506K	05W	220-240V,50Hz	>0.90	72x265	10pcs	₹ 1050.00	● ● ○
CLXTR00706K	07W	220-240V,50Hz	>0.90	72x265	10pcs	₹ 1250.00	● ● ○
CLXTR00906K	09W	220-240V,50Hz	>0.90	80x280	10pcs	₹ 1335.00	● ● ○
CLXTR01206K	12W	220-240V,50Hz	>0.90	80x280	10pcs	₹ 1565.00	● ● ○
CLXTR01506K	15W	220-240V,50Hz	>0.90	80x280	10pcs	₹ 1590.00	● ● ○
CLXTR02006K	20W	220-240V,50Hz	>0.90	80x280	10pcs	₹ 1710.00	● ● ○

Aven

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours



ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	LUMEN	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLAVN00506K	05W	220-240V,50Hz	>0.90	500lm	10pcs	₹ 710.00	● ● ○

Auris




- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours



ITEM CODE	WATTAGE	VOLTAGE	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLWL200606K	06W 2 Way Light (03W + 3W)	220-240V,50Hz	>0.90	10pcs	₹740.00	● ● ○
CLWL401206K	12W 4 Way Light (3W x 4)	220-240V,50Hz	>0.90	10pcs	₹940.00	● ● ● ●
CLWL601806K	18W 6 Way Light (6W x 3)	220-240V,50Hz	>0.90	10pcs	₹1395.00	● ● ● ● ● ●
CLWR401206K	12W 4 Way Light (3W x 4) Round	220-240V,50Hz	>0.90	10pcs	₹1650.00	● ● ● ●

Insulation Tape PVC(6mX1.5cmX0.125mm)

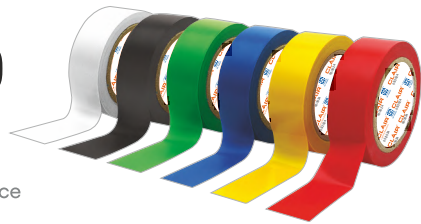


- Reliable extinguishing Electrical Insulation tape
- Stretchable grips firmly & moulds itself to any surface
- Resistance to acid, alkalis and oils
- Water Proof, Weather Proof & no-ageing
- Insulation & protection to wires of electrical appliances & machines
- Holding & insulation various transformers, capacitors, Communication system & instruments.

ITEM CODE	DIMENSION (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR
CLTAPPVC06M	PVC(6mX1.5cmX0.125mm)	1 Inner 30 Rolls	540RS.(1pcs,18RS)	● ● ● ● ● ● ● ● ● ●
CLTAPPVC15M	PVC(15mX1.7cmX0.125mm)	1 Inner 20 Rolls	900RS.(1pcs,45RS)	● ● ● ● ● ● ● ● ● ●

OUR CLIENTS



- Power Grid Corporation Of India Limited
- Indian Railway
- Steel authority of India limited
- Bharat Petroleum Corporation Limited
- BARC
- Bharat Earth Movers Limited (BEML)
- Rashtriya Ispat Nigam Ltd
- Doordarshan Kendra
- Bharat Heavy Electricals Limited (BHEL)
- Coalfields Limited
- Indian Council of Agricultural Research (ICAR)
- Ministry of Chemicals and Fertilizers
- Cantonment Board Dehradun
- MES
- PWD
- Department of School Education and Literacy
- CBSE (Central Board of Secondary Education)
- ESIC (Employee State Insurance Corporation)
- Rubber Board India
- BIRSA Agriculture University
- Deputy Collector Office
- MKCG Medical College
- Water Resources Department
- ITDA
- R & B Department Odisha
- Paradip Port Trust
- NALCO
- SIDDHA Group
- Indian Oil Petrol Pump
- Sterling Hospital
- P S Group
- Srijan Industrial Logistics Park
- DLF Group
- Bhubaneswar Municipal Corporation
- Max Fort School
- Gram Panchayat, Raidighi, West Bengal
- Howrah Municipal Porporation
- Haldiram Food, Nagpur Maharashtra
- Logistics Park, Nagpur Maharashtra
- Orient Cement, Jalgaon Maharashtra
- West Bengal Electronics Industry
- Development Corporation Limited (WEBEL)
- DCWC Community Hospital, Kathmandu, Nepal
- Kathmandu Metropolitan City, Kathmandu, Nepal
- Berger Jenson & Nicholson Nepal Pvt Ltd, Kathmandu, Nepal
- River Bank Tungle Resort Pvt Ltd, Kathmandu, Nepal
- Janakpur Refineries Pvt Ltd, Kathmandu, Nepal
- Unilore School, Kathmandu, Nepal
- Neral Engineering & Technical Sciences Academy Pvt Ltd, Kathmandu, Nepal
- News Channel, Kathmandu, Nepal
- Domestic Airport Building, Kathmandu, Nepal
- Armored Police Force Building, Kathmandu, Nepal

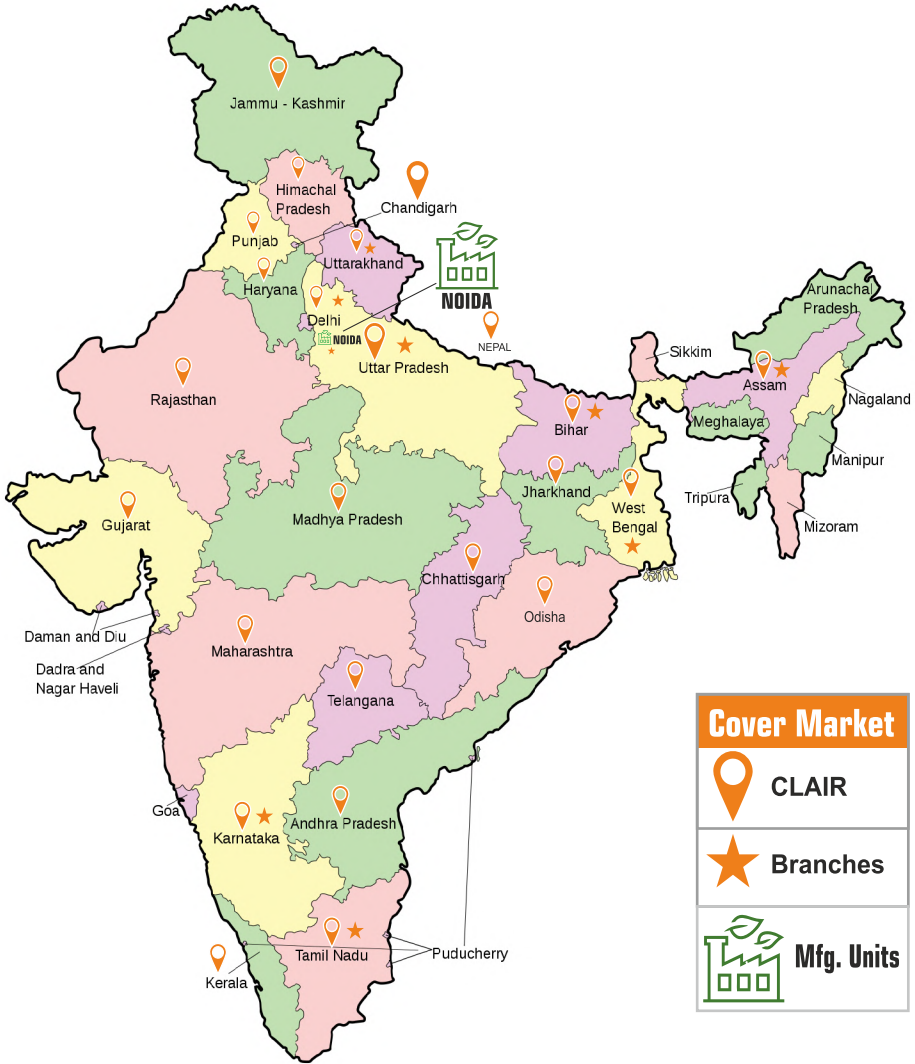

Terms & Conditions

- Prices are inclusive of GST.
- Prices are subject to change without prior notice.
- Material Damage in transportation are not cover in guarantee.
- Company will not responsible for material stolen/seized due to any illegal act.
- Photo shown in the price list may differ due to change in design and technology.
- Warranty/Guarantee applicable as per CLAIR Warranty Policy.
- All efforts have been made to insure accuracy in completion of technical/commercial details but may change due to change in design and specification.
- This price list supersede all previous Price List.
- Any disputes are subjected to Delhi jurisdiction only.

*Note: Higher lumen, Higher CRI & Extended Products Price will be Provided on Demand.



Clair Electronics Pvt. Ltd.

Branch Office:

Tamilnadu: No. 11/2, Shyam Avenue, College Road, Nungambakkam, Chennai - 600006 (Tamilnadu)
93154-01628

Karnataka: 1st Floor, No-854, Anna Poorna Complex, PP Industrial Area, Deepanjali Nagar,
Mysore Road, Bengaluru (Bangalore) Urban, Karnataka, 560026
93154-01507

West Bengal: Krishna Building, 224-A, Suit No 315, 3rd Floor, Acharya Jagdish Chandra Bose Road,
Kolkata West Bengal - 700 017
93154-01503

Uttar Pradesh: E143, Phase 1, Transport Nagar, Kanpur Road, Lucknow, Uttar Pradesh - 226012
93154-01542

Bihar: Opp. Maa Shitla Escort Tractor Agencies, Badi Pahari, Gaya-Masauri Main Road,
Patna, Bihar - 800007
93154-01598

Uttarakhand: 88/1, Tagore Villa, Chakrata Road, Nari Shilp Mandir, Dehradun, Uttarakhand, 248001
93154-01638

Assam: House No. 61, PS Bharalumukh, IIU Parthak, Bishnupur Main Road, Kamrup, Guwahati,
Assam - 781016
93154-01591

Factory:

Plot No-58, Sector-155, Noida Uttar Pradesh - 201310
93154-01548, 0120-718-5859

Feedback & Suggestion :

Customer Care Manager

✉ support@clairjg.com

☎ +91 011-49843647, 9315401565

Website : www.clairjg.com

The logo for CLAIR, featuring a stylized 'C' icon followed by the word 'CLAIR' in a bold, sans-serif font. The logo is positioned in the top right corner of the page, set against a white background that is part of a larger orange and white geometric design.

CLAIR

